



MTS200R

masTER Time-Sync

High Performance. Enhanced Security.
Accurate. Reliable. Compact. Redundant

Masibus **masTER** Time-Sync MTS200R is capable for the time synchronization requirements in various industries like power, process, IT, telecommunications etc. It generates wide range of time code and pulse signals via different output ports like 1PPS, IRIG-B TTL/AM, NTP, Serial (RS232/RS485), Event/Relay, PTP, Pulse FO.

Masibus MTS200R a GPS based time server has redundant and non-redundant options for Power supply and GPS receiver functionality. MTS200R has a 20 x 2 LCD display for viewing of time parameters, status of GPS receiver parameters, and output ports, discrete LEDs provide at-a-glance status and health information. The GPS receiver has built-in RTC backed up with on board battery to maintain time during power loss and instant recovery on power resumption.

Network Time Protocol (NTP)

MTS200R is a Stratum1 GPS based full featured NTP Server for synchronizing all types of NTP and SNTP clients in LAN. NTP v2/v3 and v4 with all modes (Unicast / Broadcast / Multicast) and NTP related all necessary MD5 authentication mechanisms are provided in this device. It is also capable to record and log internal CPU clock drift and accuracy statistics and displays it graphically on MTS200R webserver.

Networking Protocols

MTS200R supports a full suite of networking protocols for its own administration and configuration management. These are IPv4/v6, TCP, UDP, DHCP, HTTP, HTTPS, SNMP, SSH, SCP, SYSLOG, TELNET.

Security Features

MTS200R provides secured access for configuration and management through SSH, SCP, HTTPS. Full featured SNMP protocol with encryption DES/AES and authentication SHA/MD5 mechanisms. User accesses for Console and web program are encrypted password supported.

User Friendly Setup and Administration

MTS200R is simple to install and easy to manage. Front panel controls allows network configuration and other set-up parameters. DHCP and IPv6 AUTOCONF feature capability makes MTS200R easy & ready to use on site network. Further, MTS200R can be completely configured remotely through Webserver, SSH, SNMP, Telnet & Serial port. MTS200R can send notifications regarding various internal alarms to remote servers through SYSLOG and SNMP as well as logs it internally for future reference.

Features

- 12 Satellite parallel tracking
- GPS based time Server available in Redundant & Non-Redundant Options
- Ethernet Ports
- NTPv2/v3 and NTPv4 with MD5 authentication & symmetric and autokey management
- Secured Web server
- IPv4, IPv6, UDP, SNMP, SSH, SCP, HTTP, HTTPS, SYSLOG, Telnet, FTP, Networking protocols
- Remote Alarm notifications via SNMP, SYSLOG
- Remote configuration using SSH, Web, SNMP, Telnet
- Universal Time-zone and DST Settings
- Supports synchronization of IEC61850 compliant devices via NTP/SNTP protocol
- USB Port
- Universal (AC/DC) Power Supply
- Highly accurate TCXO Type crystal (OCXO Optional)
- Programmable Pulse Outputs
- Solid State relays for programmable events
- NTP Client Synchronization software
- Diagnostic Relay outputs
- Supporting Timing Protocols:
 - NMEA [GPRMC, GPZDA, GPGGA], NGTS, T-FORMAT
 - IRIG-B Modulated
 - IRIG-B TTL
 - SNTP/NTP
 - PTPv2

jp progress engineering co.ltd
PLC & WEB SCADA System
DLMS to Modbus & IEC61850 converter
www.jpprogress.com
Email: info@jpprogress.com
Tel: 02-832-826, 02-832-7253 Fax 02-832-3590

Applications: Time synchronization of

- Sequence of Event recorders, Disturbance recorders, PMU
- Numerical relays, Slave clocks
- UNIX, Linux, Solaris & Windows servers
- PLC/DCS/SCADA, ABT metering
- Telecommunication, Synchrophasor measurement
- EMS system, Fault locator

TECHNICAL SPECIFICATIONS

GPS Receiver

Timing Accuracy	< 15 ns with GPS Receiver (Receiver is locked on fixed position)
Positioning Accuracy	< 10m
Input Frequency	1575.42 MHz L1 C/A code
Tracking	12 parallel channels
Acquisition time	Hot Start < 5 sec
	Warm Start < 38 sec
	Cold Start < 45 sec

Antenna

Type	Active L1. GPS, 28 dB gain
Antenna Cable type	RG 6
Operating Temperature	-40 to +85°C
Coverage	360 Degree
Ingress Protection	IP67
Weight	150 g

Interface and Configuration

Display	2 x 20 Character backlit LCD Display
Displayed data	Local / UTC Time and Date Day of the week
	Position latitude, longitude Status of the GPS receiver Configuration parameters.
Status LEDs	Power, 1PPS, Watchdog, Error, GPS Locked
Configuration Methods	<ul style="list-style-type: none"> • Front Keypad • Front Console DB-9 Port (Serial RS232) • Web server(HTTP/HTTPS),SSH,SNMP, TELNET (Ethernet RJ45 Port)
	<ul style="list-style-type: none"> • Universal time zone correction, DST Settings • Hour settings for Display (12 or 24 format), UTC/LOCAL time display • Data format selection (NGTS/T-FORMAT/GPGGA/GPZDA) • Repetitive event generation output via Potential free Contact (Per Minute or Hour) • Additional Event Configuration (Total & On time of Events) • Manual Time setting • Propagation delay correction (compensation for antenna cable length) • IPv4 Network parameters [IP, Subnet, Gateway] , DHCP • Ethernet protocols (NTP, SNMP, Syslog, SSH, HTTP, HTTPS) service setting
Keypad Configurable Parameters	
Network Protocols	<ul style="list-style-type: none"> • IPv4, IPv6 • TCP, UDP, DHCP, AUTOCONF(IPv6) • NTP v2[RFC 1119], v3[RFC 1305] and v4[RFC 5905] with Unicast, Broadcast / Multicast Modes • SNMP v1[RFC 1157], v2[RFC 1901-1908] and v3[RFC 3411-3418] with Enterprise MIB file • SNMP v1, v2 and v3 compatible Traps with two configurable SNMP Trap Managers • SYSLOG for internal and remote Alarm logging • SSH v1, v2, Telnet for remote configuration • PTPv2 Master - IEEE C37.238-2011, IEEE C37.238-2017, IEC 61850-9-3 (except SNMP) • Webserver through HTTP and HTTPS – Browser based Configuration & monitoring
Network Security Features	<ul style="list-style-type: none"> • Configurable MD5 based encrypted password user access to SSH, Telnet and Webserver access • NTP v3,v4 MD5 Authentication with Symmetric and Autokey Management • SNMP v3 - AES/DES Encryption and SHA/MD5 Authentication • SNMP v3 with no-auth / auth / priv security feature • Configurable SSH v1, v2 with configurable 768 / 1024 / 2048 bits size security keys • Configurable HTTPS SSL certificate
Logging & Alarms	<ul style="list-style-type: none"> • Alarms and system Messages logging using SYSLOG • 100Kbytes of internal log memory • Remote logging feature two configurable SYSLOG servers • Remote Alarm Notification through SNMP Traps and SYSLOG
NTP / SNTP Client Software	<ul style="list-style-type: none"> • Platform Support: Windows 10/8.1/7 SP1/ Windows Server 2012 R2/ 2008 R2 SP1 Unix Linux, Solarisserver synchronization
USB Port	<ul style="list-style-type: none"> • 1 x USB Port on front panel • Download/ Upload of configuration files • Install firmware upgrades
Firmware Upgrade	<ul style="list-style-type: none"> • Via Webserver, USB (All Binaries + Configuration)

jp progress engineering co.ltd
PLC & WEB SCADA System
DLMS to Modbus & IEC61850 converter
www.jpprogress.com
 Email:info@jpprogress.com
 Tel:02-832-826,02-832-7253 Fax 02-832-3590

TECHNICAL SPECIFICATIONS

CPU Card

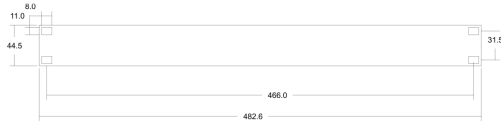
Output	Description	Connector	Accuracy (to UTC)	Output per card
ETH x (LAN)	IPv4, IPv6, DHCP, NTP, SNMP, Webserver, SSH, Telnet Mode: Server Network Interface: RJ45, Auto-negotiation, 1 st port 10/100 Mbps	RJ45	±1mSec [NTP Server]	1 x 10/100 Mbps or 1 x 10/100 Mbps + 1 x 10/100/1000 Mbps (Optional)
NMEA	NMEA frame – GPRMC Isolated output, RS232 /RS485** Fix configuration: 9600-8-N-1	Plug in screw terminals	±100nSec (PPS o/p)	1 no

**RS232/RS485 in CPU Card is site selectable, default setting RS232

Time Signal Output

Output Card Type	Description	Connector	Accuracy (to UTC)	Output per card Optional	
				Option-1	Option-2
PPS Card	<ul style="list-style-type: none"> 1 Pulse per second TTL into 250 Ω 200 ms Pulse Width 	BNC Female	±100nSec	2 nos	4 nos
IRIG-B Modulated Card	<ul style="list-style-type: none"> Format : IRIG-B(127),IEEE 1344/C37.118-2005 1 KHz AM Signal Modulation Ratio: 3:1 3 Vp-p, into 100Ω ±10% 	BNC Female	±10μSec	2 nos	4 nos
IRIG-B TTL Card	<ul style="list-style-type: none"> Format: IRIG-B (007) or IEEE1344 (field set) TTL into 50Ω 	BNC Female	±1.5μSec	2 nos	4 nos
NTP (LAN Interface)	<ul style="list-style-type: none"> Protocol Support: NTP V3, SNTP Network Protocol: TCP, Telnet, UDP, IPv4 Mode: Server 	RJ45	±1mSec [NTP Server]	2 nos	4 nos
Serial Card	<ul style="list-style-type: none"> Configurable Serial Frames (NMEA / NGTS / T-format) NMEA frames – GPRMC / GPZDA / GPGGA Output Status LED Isolated outputs RS232 or RS485 (Factory set to be selected from ordering code) Fix configuration: 9600-8-N-1 	DB9 Female	-	2 nos	NA
Event Card	<ul style="list-style-type: none"> Configurable event period (1sec to 1 Day) with ON Time from 50 milliseconds to 50% of total period PMOS relay Rating: 350V DC/120mA Output Status LED 	Plug in screw terminals AWG max. 2.5 mm ²	-	2 nos	4 nos
Relay Card	<ul style="list-style-type: none"> GPS LOCK, Redundancy, Watchdog, Error relay Rating: 230V AC/ 30V DC @ 2A; 110V DC@ 0.3A; 220V DC@ 0.12 A (max) 	Plug in screw terminals AWG max. 2.5 mm ²	-	-	4 nos
PTP Card	<ul style="list-style-type: none"> Protocol: IEEE 1588v2, NTP, SNTP Power Profile-IEEE C37.238-2011, IEEE C37.238-2017 (except SNMP) Power Utility Profile-IEC-61850-9-3 (except SNMP) Multicast, Unicast - Layer2, Layer 3 Ethernet (L2) or UDP IPv4, IPv6 (L3) Delay Mechanism - E2E / P2P Sync Messages - Upto 128 messages/second per client PTP Modes 1 Step / 2 Step mode Protocols IPv4, IPv6, DHCP, DHCP6 FTP, Telnet, SSH Interface 1 x 10/100/1000 Mbps Freq Output 1 x 1PPS 	RJ45	<200 nSec	1 no	2 nos
PRP Card	<ul style="list-style-type: none"> PRP will support NTP, SNTP and PTP 	RJ45 x 2	-	1 no	NA
Pulse o/p Card (Fiber Optic)	<ul style="list-style-type: none"> Signal Type: IRIG-B TTL (007)/PPS/PPM/PPH/PPD – configurable Transmission: Simplex Fiber Size: 62.5/125 μm Wavelength: 820 nm Distance: 1750 meters 	Multimode ST connector	As per Signal type	2 nos	4 nos
Multi-port Output Card (M1)#	<ul style="list-style-type: none"> 2 nos IRIG-B AM /TTL / PPS (any one factory set) 2 nos Event o/p 2 nos Alarm (GPS lock and Watchdog) 	As defined above respectively	As defined above respectively	Max 2 nos IRIG-B AM or TTL or PPS (any one factory set), 2 nos Event & 2 nos Alarm in One Card	
Multi-port Output Card (M2)#	<ul style="list-style-type: none"> 1 no IRIG-B AM /TTL / PPS (any one factory set) 2 nos Event o/p 2 nos FO over IRIG-B TTL (007)/PPS/PPM/PPH/PPD – factory configurable 2 nos Alarm (GPS lock and Watchdog) 	As defined above respectively	As defined above respectively	Max 1 no IRIG-B AM or TTL or PPS (any one factory set), 2 nos FO over IRIG-B TTL/PPS /PPM/PPH/PPD – factory set, 2 nos Event & 2 nos Alarm in One Card	

TECHNICAL SPECIFICATIONS

Power Supply		Environmental	
Standard	90 - 264 V AC / 125- 370 V DC, 35W	Operating temperature	0 to +55°C
Option-1	18 - 36 V DC, 30W	Storage temperature	-20 to +80°C
Option-2	36 - 75 V DC, 30W	Humidity	20-95 % RH Non Condensing
Output Status	Power LED status, Power Fail Relay output	Type test	
Isolation (Withstanding voltage) Between primary terminals* and secondary terminals**: At least 1500 V AC for 1 minute Between primary terminals* and grounding terminal: At least 1500 V AC for 1 minute Between grounding terminal and secondary terminals**: At least 1500 V AC for 1 minute Between secondary terminals**: At least 500 V AC for 1 minute * Primary terminals indicate power terminals and relay output terminals. ** Secondary terminals indicate Output Ports Insulation resistance: 50MΩ or more @ 500 V DC between power terminals and grounding terminal. Note: No Isolation between IRIGB-TTL and PPS Output.		Electrostatic Discharge (ESD)	IEC 61000-4-2
Physical		Radiated Susceptibility	IEC 61000-4-3
Mounting	1U, 19" Rack Mount	EFT Test	IEC 61000-4-4
Dimensions (mm)	45(H) x 483(W) x 251(D)	Surge Test	IEC 61000-4-5
Ingress protection	IP20 enclosure	Conducted Susceptibility (Conducted RF)	IEC 61000-4-6
Weight	3 Kg	Power Frequency Magnetic Field	IEC 61000-4-8
Mounting Dimensions		High Frequency Disturbance	IEC 61000-4-10
		Voltage interruption/voltage dips	IEC 61000-4-11
		Ringwave Immunity test	IEC 61000-4-12
		Radiated Emission	As per CISPR 11
		Conducted Emission	As per CISPR 11
		Vibration	IEC 68-2-6
		Bump Test	IS 9002 Part-7
		Dry Heat Test	IEC 60068-2-2
		Damp Heat Steady State test	IEC 60068-2-30
		Shock Test	IEC 60255-21-2
		Dielectric Test	
		Cold Test	IEC 60068-2-1: 2007

Ordering Code

Model	Receiver Clock Module	Power supply		CPU with Ethernet o/p	Output Card(select code for card type from Table1.1)				Antenna Cable Length
		PS-1	PS-2		Card-1	Card-2	Card-3	Card-4*	
MTS200R	X	X	X	X	X	X	X	X	X
	1 1 x Clock Module	1 90 - 264 V AC/ 125- 370 V DC	N None	C1 1 x 10/100 Mbps					0 None
	2* 2 x Clock Module	2 18-36 V DC	1 90 - 264 V AC/ 125- 370 V DC	C2 1 x 10/100 Mbps + 1 x 1Gbps					1 15 meters
		3 36-75 V DC	2 18-36 V DC						2 30 meters
			3 36-75 V DC						3 50 meters
									4 100 meters
									5 Special

Code-X	Card Type/ No of ports
N	None
1B	IRIG-AM (2 ports)
1C	IRIG-AM (4 ports)
2B	IRIG-TTL (2 ports)
2C	IRIG-TTL (4 ports)
3B	1PPS (2 ports)
3C	1PPS (4 ports)
4B	Serial (2 ports)
5B	Event/ Pulse (Electrical) (2 ports)
5C	Event/ Pulse (Electrical) (4 ports)
6B	NTP (2 ports)
6C	NTP (4 ports)
7C	Relay (4 ports)
8A	PTP (1 port)
8B	PTP (2 ports)
PB	PRP
AB	Pulse FO (2 ports)
AC	Pulse FO (4 ports)
M1	Multiport Card*
M2	Multiport Card*

m-AN-01: Antenna – 1 no
m-AR-01-01: Antenna Rod (0.5 meter) – 1 no

m-LA-01: Lighting Arrestor (Surge Suppressor)
m-SR-01: RS485 Repeater
TDR-4: Time Distribution Rack
TSR-4: Time Signal Repeater

jp progress engineering co.ltd
PLC & WEB SCADA System
DLMS to Modbus & IEC61850 converter
www.jpprogress.com
 Email: info@jpprogress.com
 Tel: 02-832-826, 02-832-7253 Fax 02-832-3590

#Customer to specify the required o/p type in Multiport Card while ordering
 *When Redundant Receiver Clock module is selected, only 3 Output Cards possible